

Call Mute

- Press  during a call to mute the call.
- Press  again to un-mute the call.

Call Hold and Resume

To place a call on hold:

Press the **Options** soft key, and select **Hold** during a call.

To resume the call, do one of the following:

- If there is only a call on hold, press  .
- If there are two calls on hold, press the **Resume** soft key to resume the current call, press the **Swap** soft key to swap between the two calls.

Call Transfer

You can transfer a call in the following ways:

Blind Transfer

1. Press  during a call. The call is placed on hold.
2. Enter the number or select the desired handset you want to transfer to.
3. Press  or the **Transfer** soft key.

Semi-Attended Transfer

1. Press the **Options** soft key during a call, and select **Transfer**. The call is placed on hold.
2. Enter the number or select the desired handset you want to transfer to.
3. Press the **OK** key to dial out.
4. Press  or the **Transfer** soft key when you hear the ring-back tone.

Attended Transfer

1. Press the **Options** soft key during a call, and select **Transfer**. The call is placed on hold.
2. Enter the number or select the desired handset you want to transfer to.
3. Press the **OK** key to dial out.
4. Press  or the **Transfer** soft key after the call is answered.


Call Forward

To enable the call forward feature on a specific line:

1. Press the **OK** key to enter the main menu, and select **Call Features->Call Forward**.
2. Select the desired line.
3. Select the desired forwarding type:
 - Always**----Incoming calls are forwarded immediately.
 - Busy**----Incoming calls are forwarded when the phone is busy.
 - No Answer**----Incoming calls are forwarded if not answered after a period of time.
4. Select **Enabled** from the **Status** field.
5. Enter the number you want to forward to in the **Target** field.
6. Press  or  to select the desired ring time to wait before forwarding (only for No Answer Forward) in the **After Ring Time** field.
7. Press the **Save** soft key to accept the change.



IP DECT Phone W52P & W52H

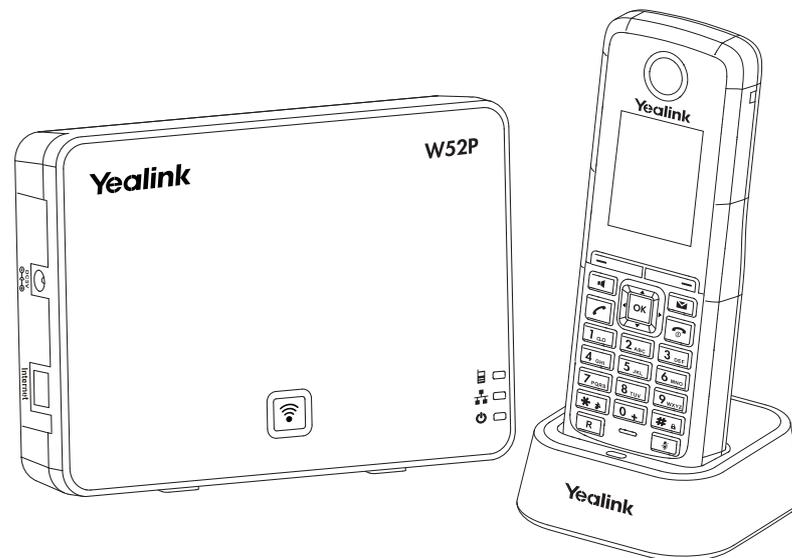

Quick Reference Guide

www.yealink.com

Basic Operations

Turning Handset On/Off

To turn the handset on, do one of the following:

- Long press  until the LCD screen lights up.
- Place the handset in the charger cradle. The handset will be turned on automatically.

To turn the handset off:

Long press  again to turn the handset off.

Locking/Unlocking Keypad

- Long press  to lock the keypad.
- Long press  again to unlock the keypad.

Switching Silent Mode On/Off

- Long press  to switch the silent mode on.
- Long press  again to switch the silent mode off.

Handset Settings

Handset Rename

1. Press the **OK** key to enter the main menu, and select **Settings->Handset Name**.
2. Press the **<C** soft key to erase the current name in the **Rename** field.
3. Enter a new name.
4. Press the **Save** soft key to accept the change.

Volume Adjustment

- Press  or  during a call to adjust the volume of the currently used audio device.
- Press  or  when the handset is idle to adjust the ringer volume.

Ring Tone

1. Press the **OK** key to enter the main menu, and select **Settings->Audio->Ring Tones->Melodies**.
2. Select the desired line, the **Internal Call** option or the **DectPhone** option.
3. Press  or  to select the desired ring tone.
4. Press the **Save** soft key to accept the change.

Local Directory

To add a contact:

1. Press the **OK** key to enter the main menu, and select **Directory**.
2. Press the **Options** soft key, and select **New Contact**.
3. Enter the desired values in the **Name**, **Office** and **Mobile** fields.
4. Press the **Save** soft key to accept the change.

To edit a contact:

1. Press the **OK** key to enter the main menu, and select **Directory**.
2. Press  or  to highlight the desired entry.

3. Press the **Options** soft key, and select **Edit**.
4. Edit the values in the **Name**, **Office** and **Mobile** fields.
5. Press the **Save** soft key to accept the change.

To delete a contact:

1. Press the **OK** key to enter the main menu, and select **Directory**.
2. Press  or  to highlight the desired entry.
3. Press the **Options** soft key, and select **Delete** to delete the selected entry.

To assign a number to speed dial:

1. Press the **OK** key to enter the main menu, and select **Settings->Telephony->Speed Dial**.
2. Press  or  to highlight the desired speed dial key, and press the **Assign** soft key.
3. Press  or  to highlight the desired entry, and press the **OK** soft key.
4. Select the office number or mobile number, if both are stored.
5. Press the **OK** soft key to accept the change.

Basic Call Features

Placing Calls

To place a call directly:

Enter the desired number when the handset is idle, and press .

To place a call from the local directory:

1. Press  when the handset is idle to access the local directory.
2. Press  or  to highlight the desired entry, and press .
3. Select the office number or mobile number if both are stored, and press  again.

To place a call from the call log:

1. Press the **Call Log** soft key, and select the desired list.
2. Press  or  to highlight the desired entry, and press .

To place a call from the redial list:

1. Press  when the handset is idle.
2. Press  or  to highlight the desired entry, and press .

To place a call using the speed dial key:

Long press the speed dial key to place a call to the predefined number.

Answering Calls

To answer a call, do one of the following:

- Press the **Accept** soft key.
- Press .
- Press .

Note: You can ignore an incoming call by pressing the **Silence** soft key or reject an incoming call by pressing .

Ending Calls

- Press .